FBHE Series

CHARACTERISTICS

- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 4000pcs

APPLICATION

- Data lines and low power lines
- Connec on between digital and analog circuit

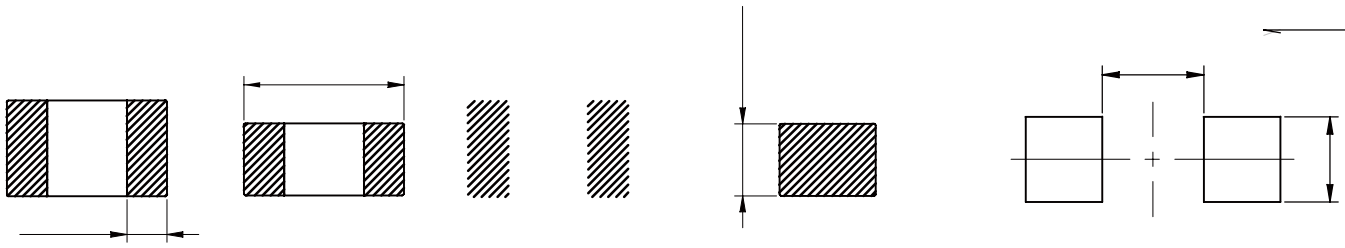

Part Number	Impedance (q)	Test Frequency (MHz)	DC Resistance (q)max.	Rated Current (mA)max.

Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

α

α

α

α

α