



FBHE Series

SMD Suppression Ferrite Bead

Size 1206



CHARACTERISTICS


- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 3000pcs

APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

Dimensions: [mm]

Land Pattern: [mm]

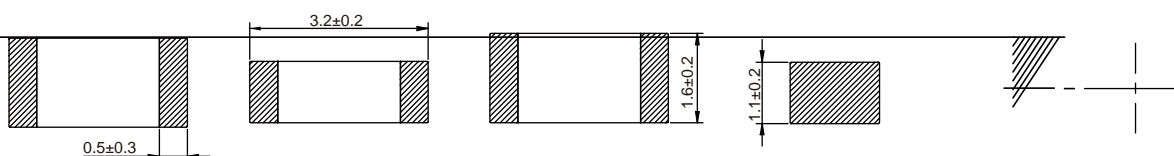

Electrical Properties:

Part No	Impedance @100MHz ()	Tolerance	DCR (max) ()	Temperature Rise Current (max) (mA)

Operating Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Temperature rise current the actual value of DC current when the temperature rise is $\leq 40^{\circ}\text{C}$



Impedance & Frequency Characteristics:

