
MDE Series
Molding Power Inductors
Size 1265




FEATURES

-
-
- ℃ maximum total temp a ure opera on
-
- Ultra low buzz noise due to ing construc on
-
- Opera ng temperature rang 5 ℃ to + 125 ℃
- Quan ty: 500pcs


APPLICATION

-
-
- Base sta ons
-
- Ba ery powered devices
-

Dimensions: [mm]

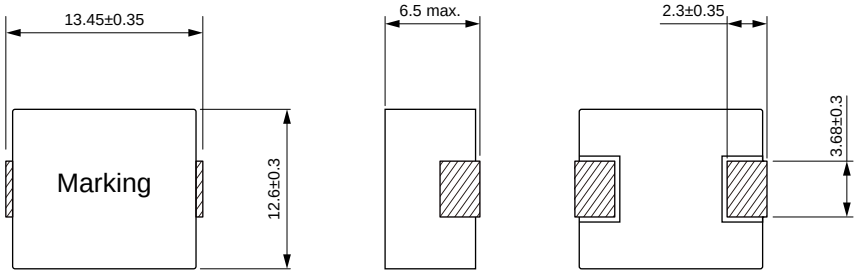

Land Pattern: [mm]




Electrical Properties:

Part No	Inductance @ 100kHz/0.25V	Tolerance	DC Resistance Max.	Satura on Current Typ. (A)	ture Rise Curr Typ. (A)

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C


KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com

Typical Electrical Characteristics:

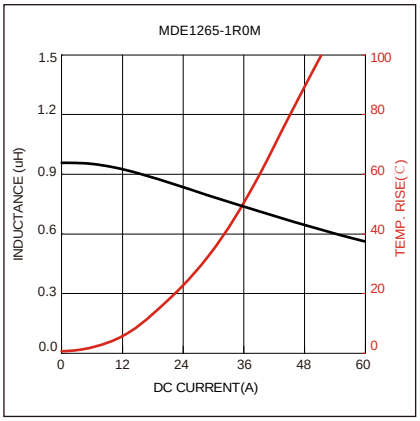


Packaging Information:

Peel force of top cover tape:

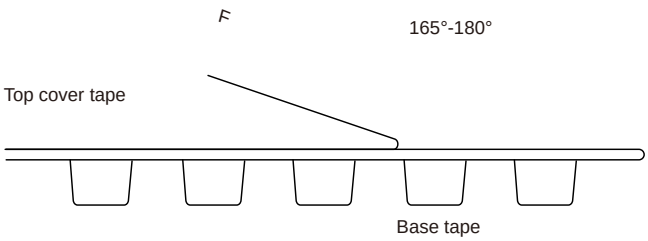

Reel Dimension：[mm]



Packaging Quantity: