TLAR Series

Molding Power Inductors

Size 100760





FEATURES

- Compliant for 100% Lead(Pb)-Free and RoHS.
-
-
-

APPLICATION


-
-
-
-

Dimensions: [mm]

tl·№ú b2	OCL	LyŘdzŏúl·yŏŜ @ 100KHz/1V ó> l ú							Kps Typ.
			Typ	Max	Typ	Max	Typ	Max	
	1		0.14	0.16	68		88		
			0.14	0.16	68		88		


All test data is referenced to 25 °C ambient.
Saturation Current will cause L0 to drop approximately 30%.
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40 °C.

Soldering Reflow:

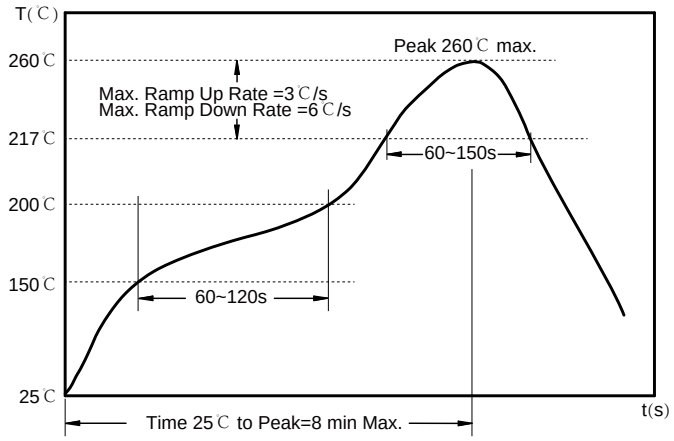

Packaging Information:

Tape Dimension:

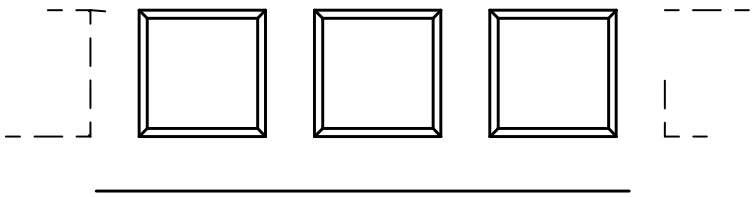

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)

Product Marking:

Marking	Printing (Inductance)

Reel Dimension：[mm]

Cautions and Warnings:

Storage Conditions：

-

Operation Instructions: