


- Compliant for 100% Lead(Pb)-Free and RoHS.
- Higher current carrying Capacity, lower DCR, and more e ciency.
- Opera ng temperature: -55 to +125 °C(Including self - temperature rise).
- Quan ty: 400PCS

- AI Servers, Data Centers, GPU/AI Accelerators.
- Desktop Motherboards, CPU/GPU Power Delivery.
- Mul -phase VRM, High-current DC-DC Converters.
- Networking Equipment, Communica on Infrastructure.




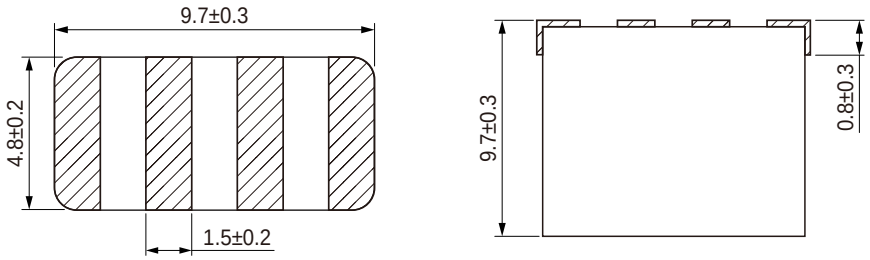

Part No	Inductance (μH)	Min. (nH)	Resistance (mΩ)	Resistance (mΩ)	Rise Current	Satura on Current	Hi-Pot Min.	Min.
TLVR100510-R10M-02	0.1±20%	58	0.125±10%	0.40±10%	75	130	100	0.9

△

:

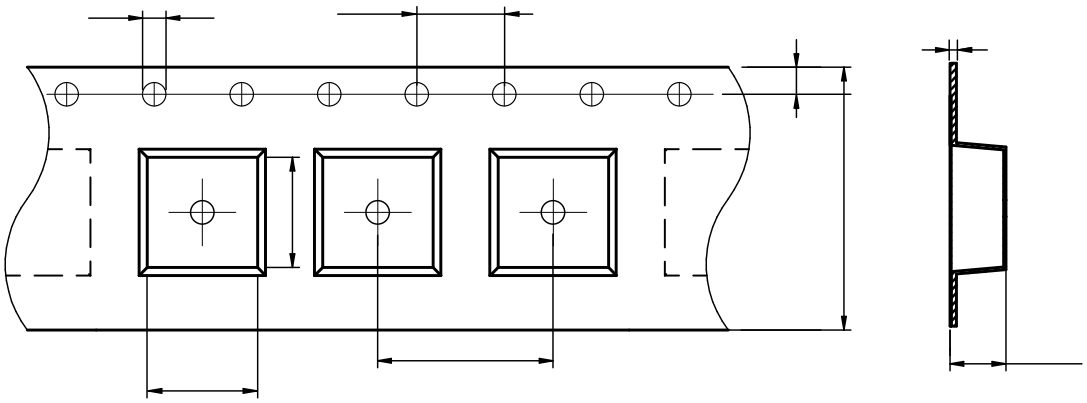

5.3±0.1	10.3±0.1	1.5±0.1	4.0±0.1	12.0±0.1	24.0±0.3	10.3±0.1	1.75±0.1	0.5±0.05

Marking	Printing Inductance)