



MDA Series

SMD Low Profile High Current Molded Inductor
Size 1870

Electrical Properties:


















MDA1870-220M	22.0	±20%	13.5	11.5	13.5	11.5	20.5	24.0
MDA1870-330M	33.0	±20%	12.0	10.0	12.0	10.0	32.0	37.0
MDA1870-470M	47.0	±20%	9.5	8.0	9.5	8.0	40.0	47.0
MDA1870-680M	68.0	±20%	8.0	6.5	8.5	7.2	66.0	76.0
MDA1870-820M	82.0	±20%	6.5	5.7	8.0	6.5	69.0	83.0

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $T=40^{\circ}\text{C}$


Typical Electrical Characteristics:

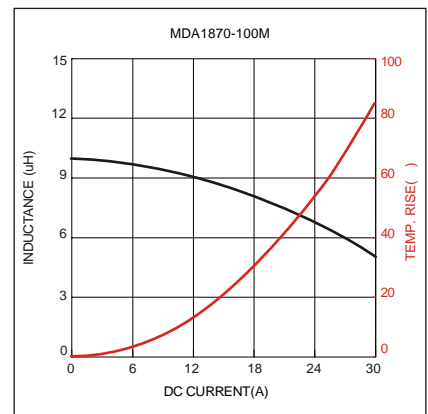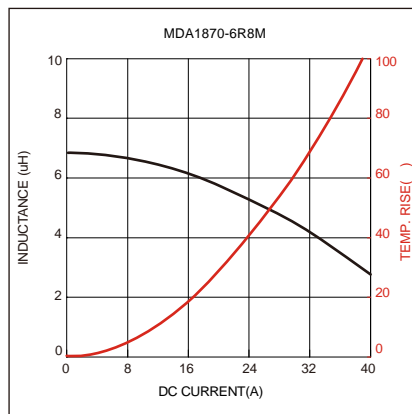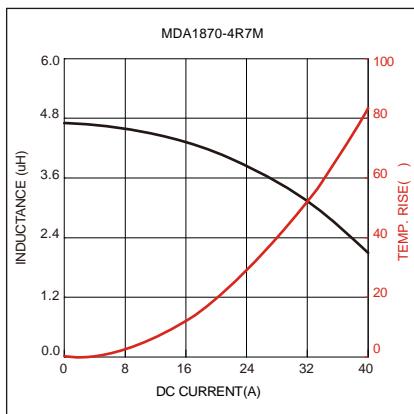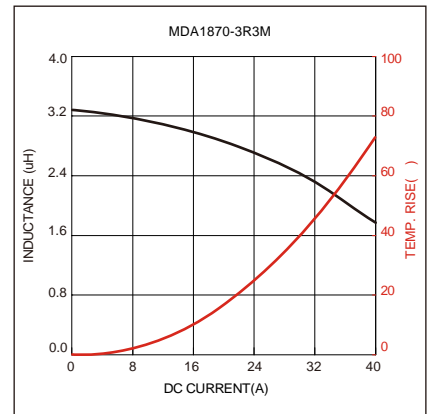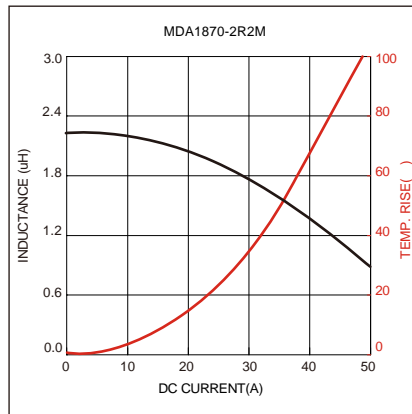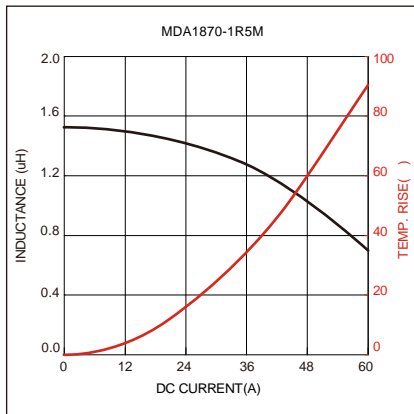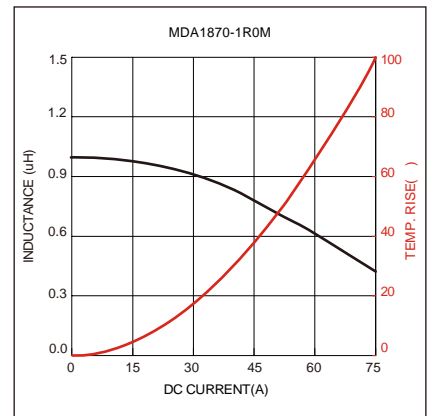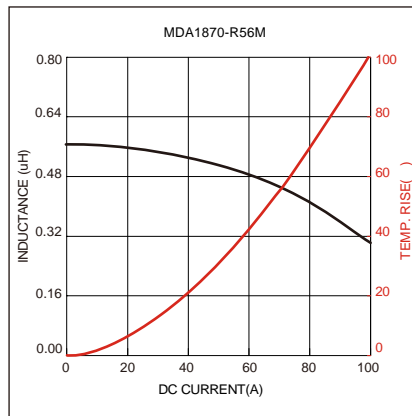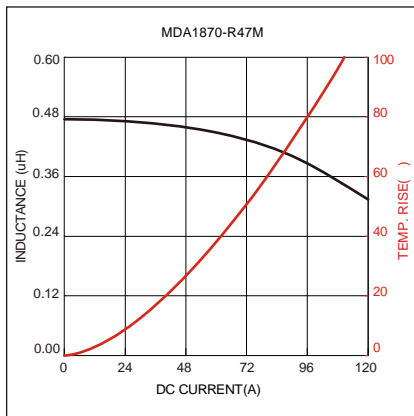

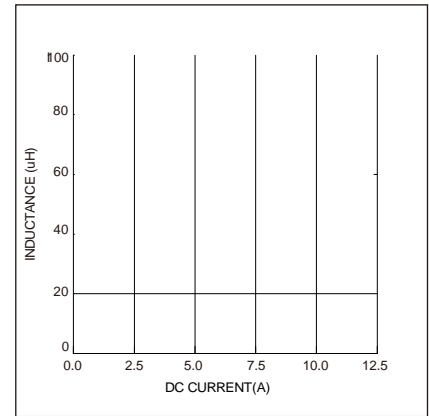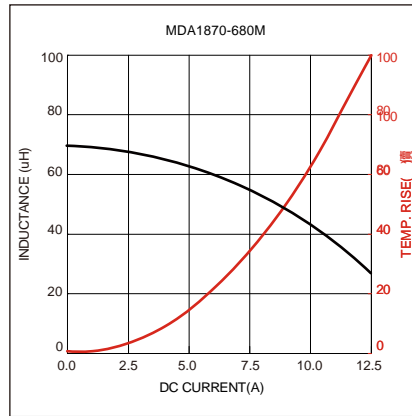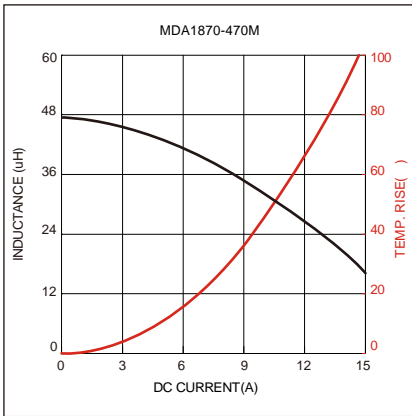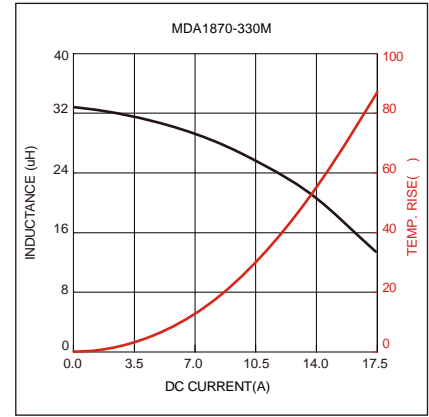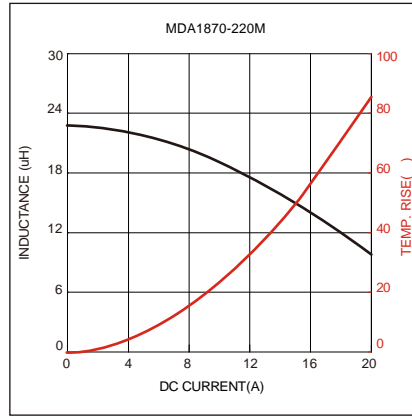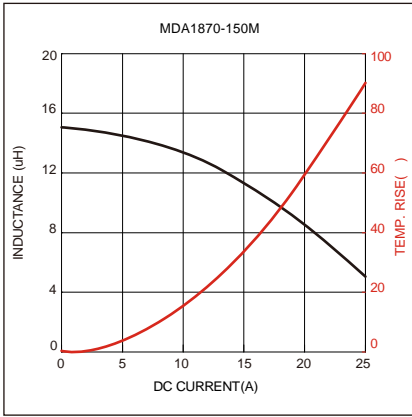



Soldering Reflow:

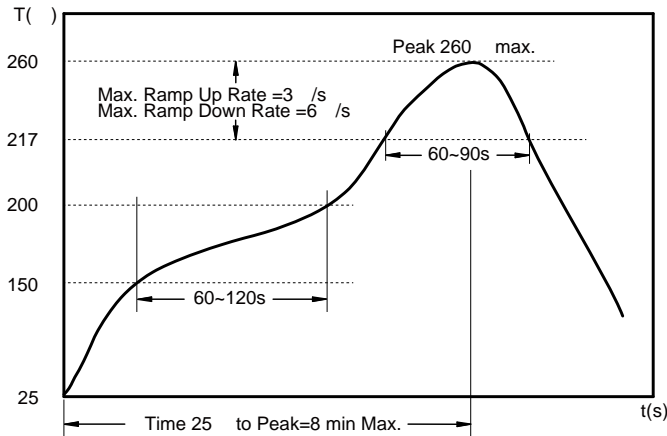

Preheat condition: 150 ~200 / 60~120 sec.

Allowed time above 217 : 60~90 sec.


Max temperature: 260 .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

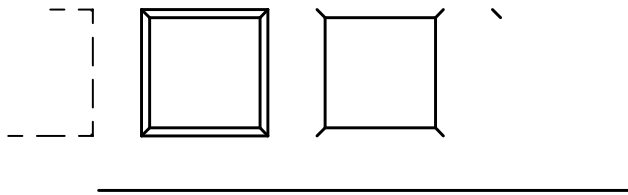

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDA1870	17.5± 0.1	18.1± 0.1	1.5± 0.1	4.0± 0.1	24.0± 0.1	32.0± 0.3	7.3± 0.1	1.75± 0.1	0.50± 0.05

Peel force of top cover tape:

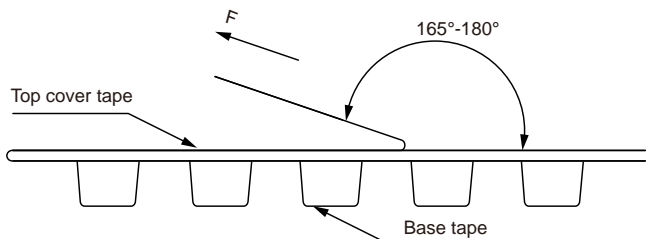


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:


Marking	KH+Printing Inductance+period)
---------	--------------------------------



Reel Dimension : [mm]

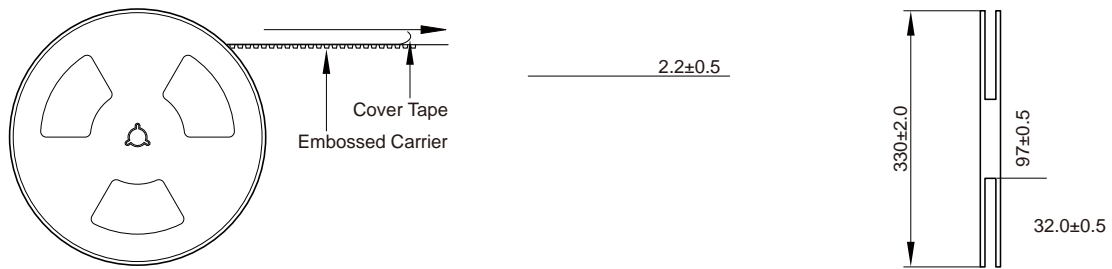


Packaging Quantity:



200 Pcs/Reel



2 Reel /Inner box(400 Pcs)



2 Inner box/ Carton box(800 Pcs)

Cautions and Warnings:

Storage Conditions :

-

Operation Instructions: